tempt collection



Lexmark+Hospitality





DIFFUSION



PRODUCT SPECIFICATIONS

Product ID:

DF001V

Name: Diffusion I

Construction:

Vivid - 12 Color Cut/Loop CYP

Fiber Content:

100% C.F. Lextron Enviro-Green®

Solution Dyed Nylon

Pattern Repeat:

7'6" x 14'7"

Tufted Pile Weight:

42 oz./sq. yd.

Finished Pile Height:

approx. 0.250"/0.0187"/0.062"

Primary Backing:

Woven Polypropylene

Secondary Backing:

Unitary w/Actionbac®

Total Weight:

approx. 78 oz./sq. yd.

Yarn Size:

1360/2 ply

Width:

15 ft.

Radiant Panel: Class 1

Smoke Density:

Less than 450

Warranty:

10 Year Wear

Traffic Class:

Heavy (Corridor/Public Areas)



8517 8523 8501 3510







7503 2508 M8511 7501 7502

Color 146



DIFFUSION public space



PRODUCT SPECIFICATIONS

Product ID: DF002V

Name: Diffusion II

Construction:

Vivid - 12 Color Cut/Loop CYP

Fiber Content:

100% C.F. Lextron Enviro-Green®

Solution Dyed Nylon

Pattern Repeat:

7'6" x 8'7"

Tufted Pile Weight:

42 oz./sq. yd.

Finished Pile Height:

approx. 0.250"/0.0187"/0.062"

Primary Backing:

Woven Polypropylene

Secondary Backing:

Unitary w/Actionbac®

Total Weight: approx. 78 oz./sq. yd.

Yarn Size:

1360/2 ply

Width:

15 ft.

Radiant Panel: Class 1

Smoke Density:

Less than 450


Warranty: 10 Year Wear

Traffic Class:

Heavy (Corridor/Public Areas)





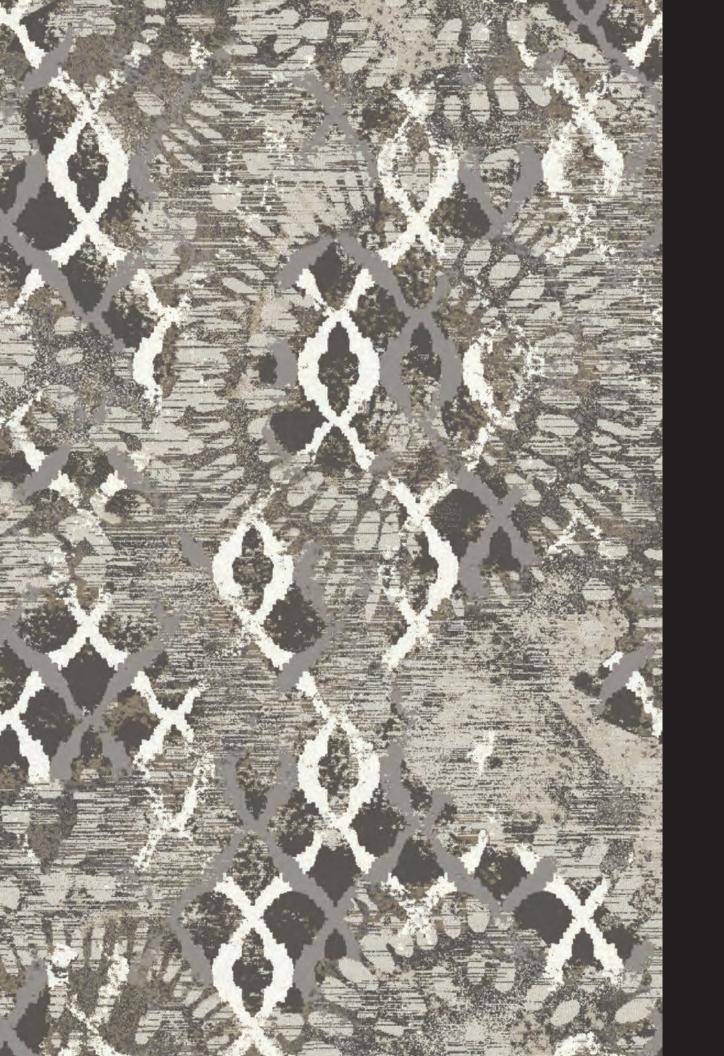

DIFFUSION public space



PRODUCT SPECIFICATIONS

Product ID: DF003V

Name:

Diffusion III

Construction:

Vivid - 12 Color Cut/Loop CYP

Fiber Content:

100% C.F. Lextron Enviro-Green®

Solution Dyed Nylon

Pattern Repeat:

7'6" x 8'7"

Tufted Pile Weight:

42 oz./sq. yd.

Finished Pile Height:

approx. 0.250"/0.0187"/0.062"

Primary Backing:

Woven Polypropylene

Secondary Backing:

Unitary w/Actionbac®

Total Weight: approx. 78 oz./sq. yd.

Yarn Size: 1360/2 ply

Width:

15 ft.

Radiant Panel: Class 1

Smoke Density:

Less than 450

Warranty:

10 Year Wear

Traffic Class:

Heavy (Corridor/Public Areas)




1504 8524

8519

8517 8523 8501 3510



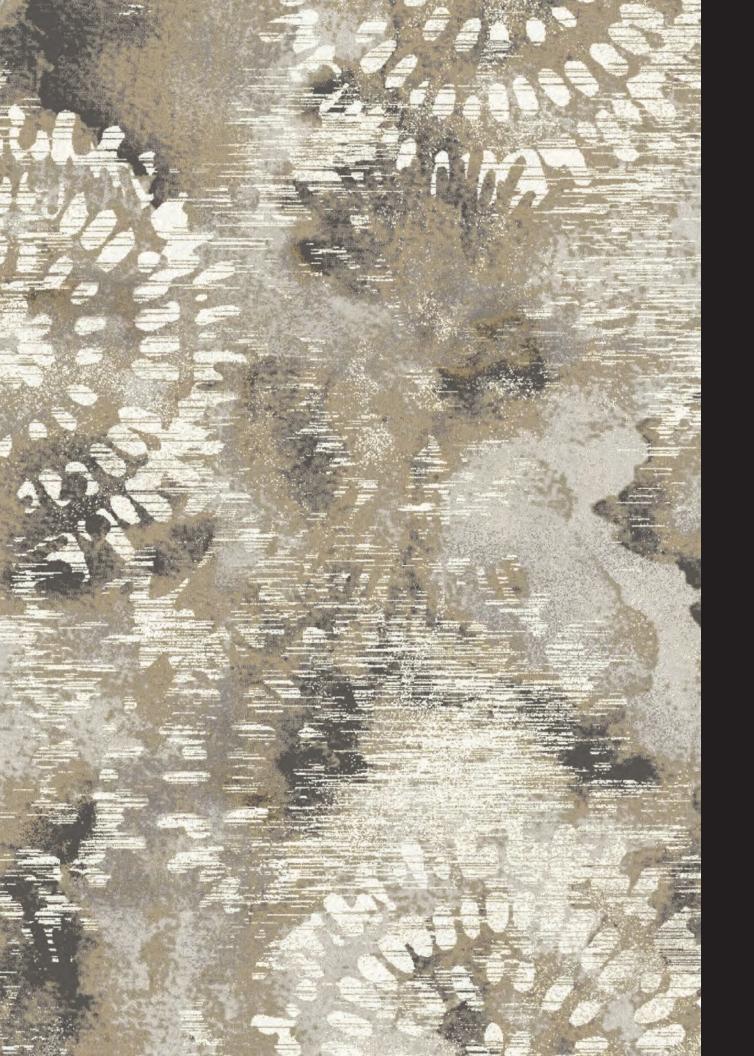

DIFFUSION



PRODUCT SPECIFICATIONS

Product ID: DF004V

Name:

Diffusion IV

Construction:

Vivid - 12 Color Cut/Loop CYP

Fiber Content:

100% C.F. Lextron Enviro-Green®

Solution Dyed Nylon

Pattern Repeat:

3' x 2'

Tufted Pile Weight:

42 oz./sq. yd.

Finished Pile Height:

approx. 0.250"/0.0187"/0.062"

Primary Backing:

Woven Polypropylene

Secondary Backing:

Unitary w/Actionbac®

Total Weight: approx. 78 oz./sq. yd.

Yarn Size:

1360/2 ply

Width:

15 ft.

Radiant Panel:

Class 1

Smoke Density:

Less than 450

Warranty:

10 Year Wear

Traffic Class:

Heavy (Corridor/Public Areas)










Color 446

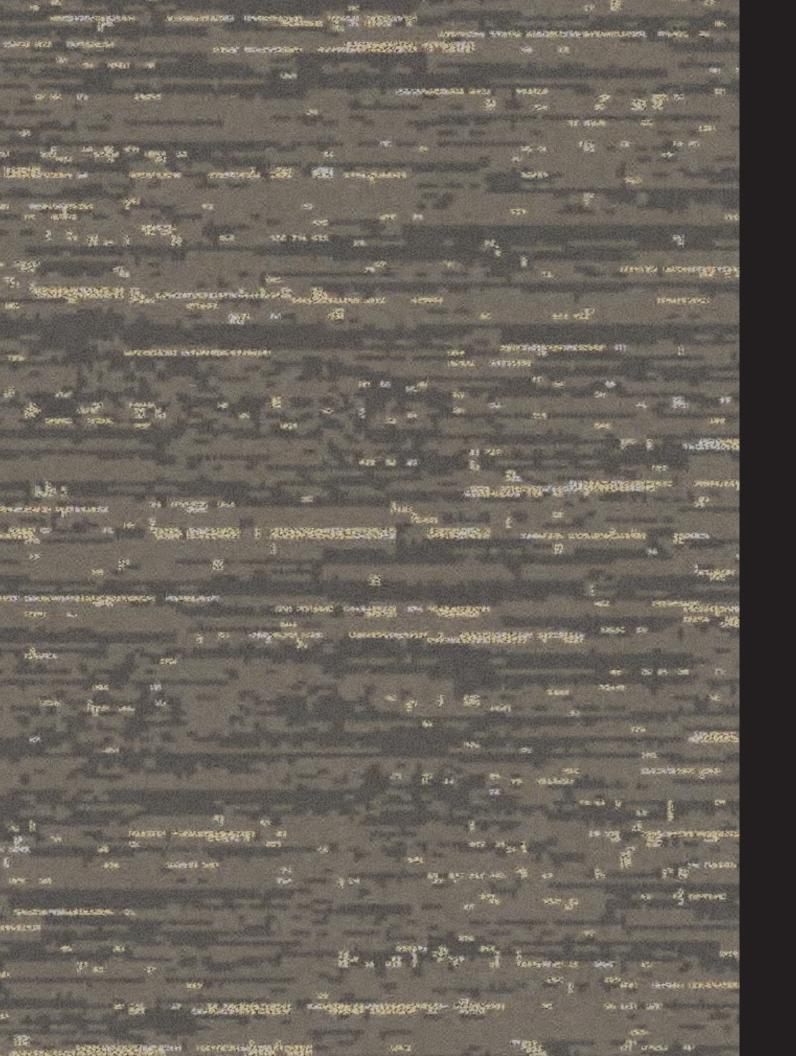





PRODUCT SPECIFICATIONS

Product ID:

DF005D

Name:

Diffusion V

Construction:

Dynamics - Servo-Loop Scroll Tip Shear

Fiber Content:

100% C.F. Lextron Enviro-Green® Solution Dyed Nylon

Pattern Repeat:

3' x 4'11"

Tufted Pile Weight:

32 oz./sq. yd.

Finished Pile Height: approx. 0.250"/0.0187"/0.062"

Primary Backing:

Woven Polypropylene

Secondary Backing:

Unitary w/Actionbac®

Total Weight: approx. 68 oz./sq. yd.

Yarn Size: 1360/2 ply

Width:

12 ft.

Radiant Panel:

Class 1

Smoke Density:

Less than 450

Warranty:

10 Year Wear

Traffic Class:

Moderate (Rooms)









PRODUCT SPECIFICATIONS

Product ID:

DF006D

Name: Diffusion VI

Construction:

Dynamics - Servo-Loop Scroll Tip Shear

Fiber Content:

100% C.F. Lextron Enviro-Green® Solution Dyed Nylon

Pattern Repeat:

3' x 3'7"

Tufted Pile Weight:

32 oz./sq. yd.

Finished Pile Height:

approx. 0.250"/0.0187"/0.062"

Primary Backing:

Woven Polypropylene

Secondary Backing:

Unitary w/Actionbac®

Total Weight:

approx. 68 oz./sq. yd.

Yarn Size:

1360/2 ply

Width:

12 ft.

Radiant Panel:

Class 1

Smoke Density:

Less than 450

Warranty:

10 Year Wear

Traffic Class:

Moderate (Rooms)










Color 646





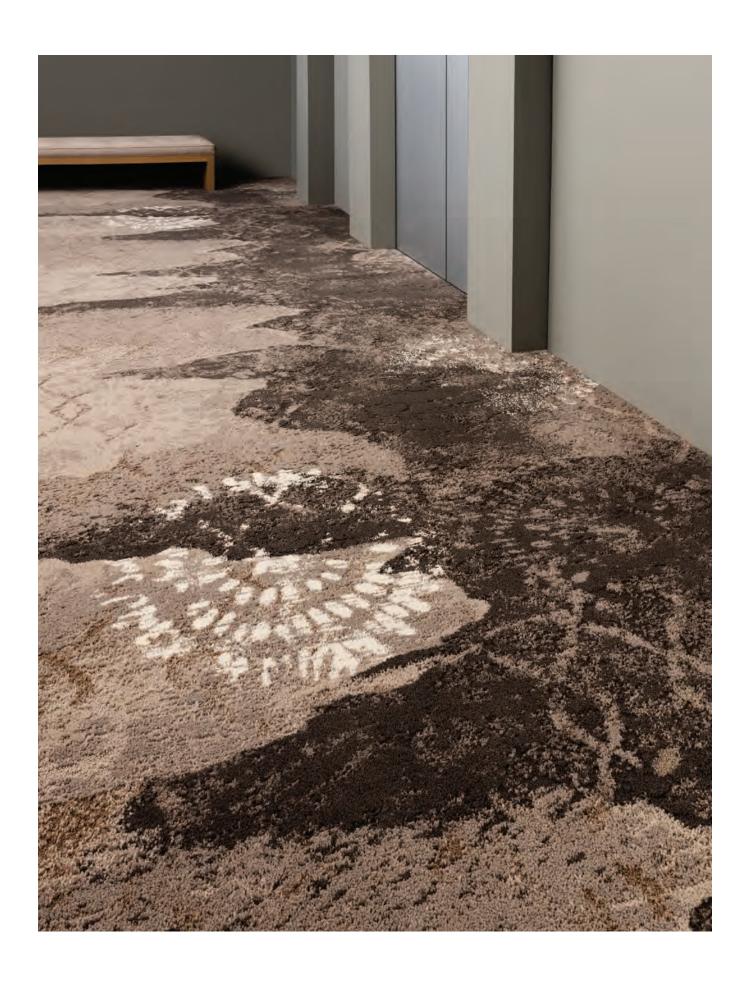

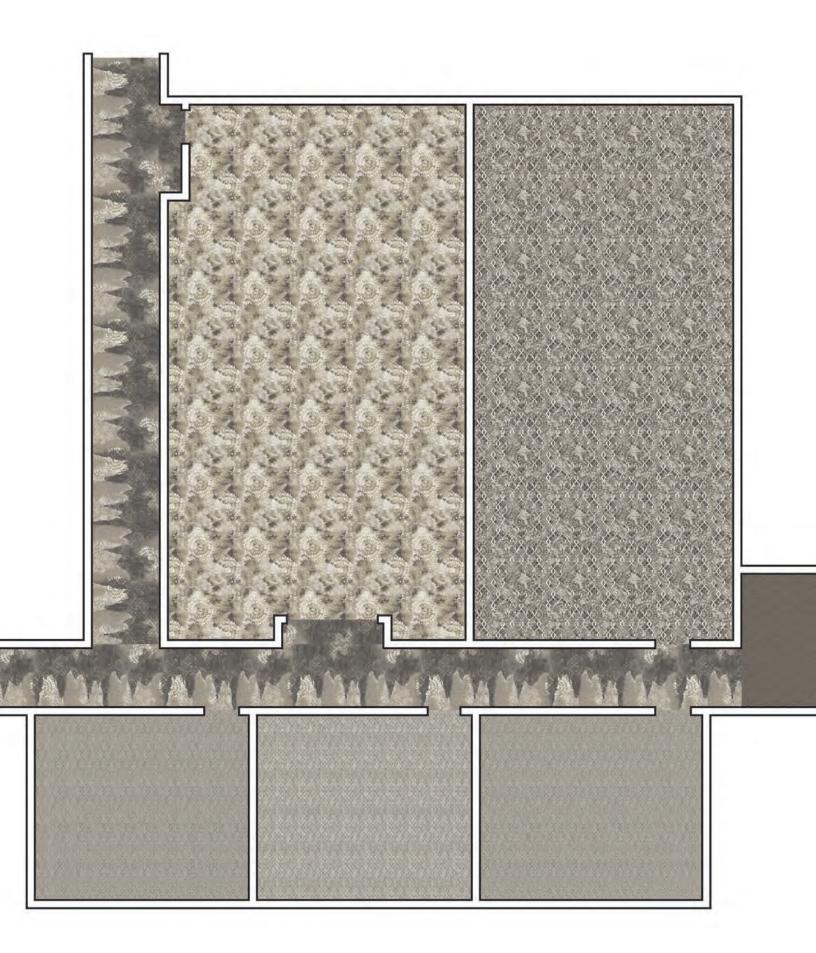

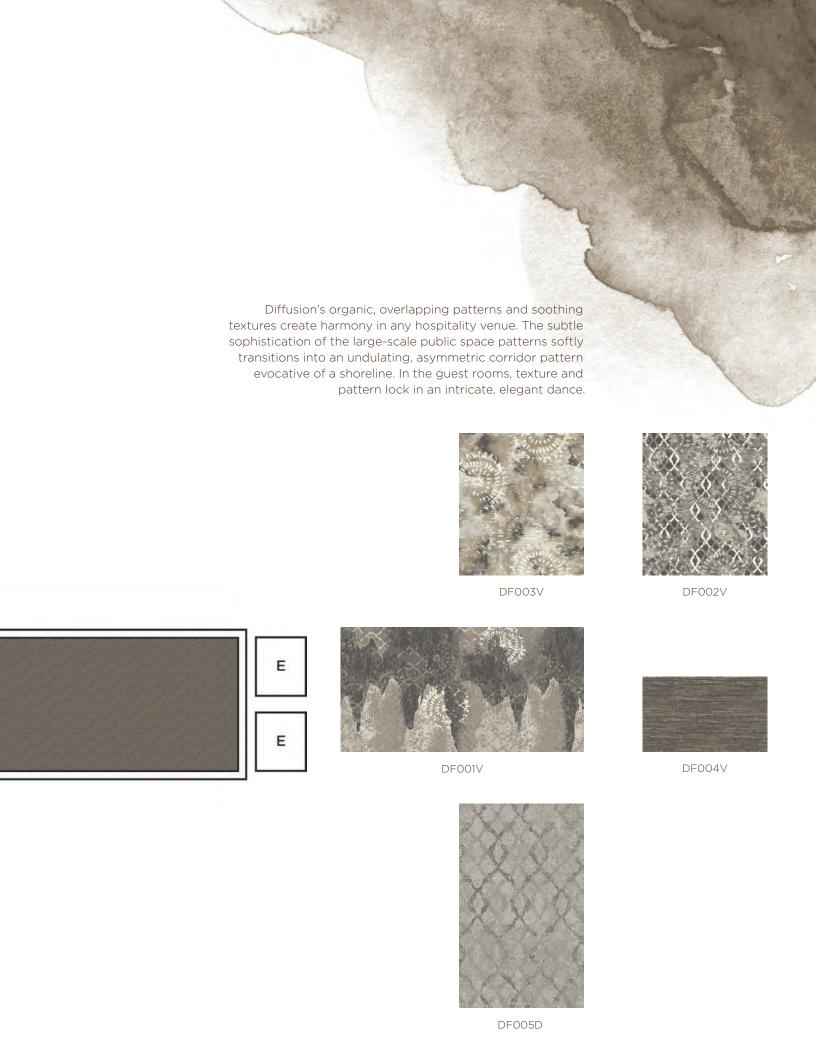

inasina

Lextron Enviro Green* contains 10% pre consumer waste. CRI Green Label Plus indoor air quality testing program certification # GLP2380.

Carpet should be installed in accordance with the Carpet and Rug Institutes's Standard CRI-104. Carpet must be installed over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width directions. It is not a carpet defect, but is inherent in solution dyed graphic and cut and loop patterns.

All specifications are subject to normal manufacturing tolerances

Due to the manufacturing process of a tip sheared product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Lexmark+Hospitality

285 Kraft Dr. | Dalton, GA 30721 | 800-871-3211 |exmarkhospitality.com | edgebylexmark.com