


avid

AN IHG HOTEL

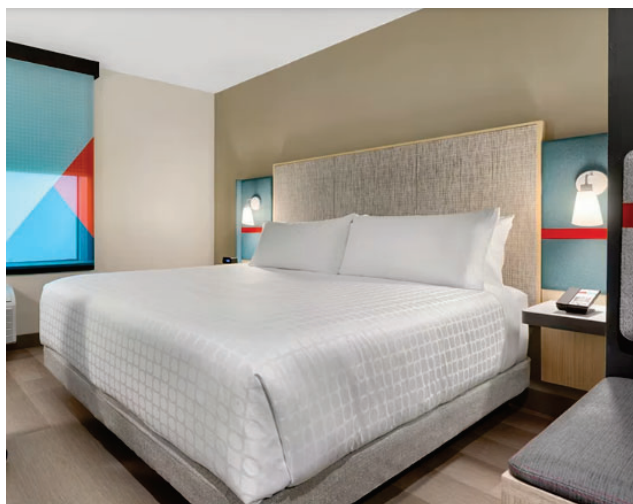

Manufacturer: Tarkett Hospitality
Address: 285 Kraft Drive
Dalton, GA 30721

Phone: 800.871.3211
Contact: IHG.Orders@tarkett.com
Web: www.tarketthospitality.com

avid Hotels: Public Areas Carpet Cove Base @ Corridor

Product Information - IIHG SPEC NO: REP-CB01

Style Number/Color	728S c. 8501
Product Type	Carpet Cove Base (4"H)
Construction	CPG - Cut Pile Graphics
Fiber	100% C.F. Lextron Enviro-Green Nylon
Dye Method	Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Action Bac


Specifications

Gauge	1/10
Stitches per Inch	9
Tufted Weight	26 oz per sq/yd
Total Weight Finished	64 oz
Pile Thickness	.250 in. Approx.
Width	12 ft
Suggested Install	Adhesive per Manufacturer's Recommendation

Performance

Traffic Class	Recommended for Cove Base only
Radiant Panel	Class I
Smoke Density	ASTM E 662 Less than 450
Pattern Repeat	.25 in. W x .25 in. L

Warranty	10 Year Wear Guarantee
-----------------	-------------------------------

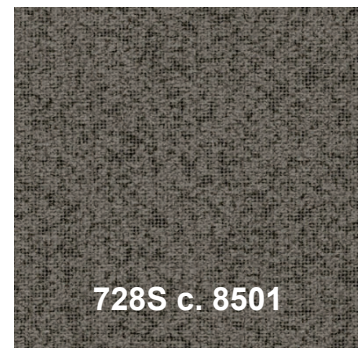

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.
Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Product Notes

- Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
Colors may vary slightly from dye lot to dye lot.
- U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.

avid Hotels: Public Areas Carpet Carpet Wall Base @ Stairwells

Product Information - IHG SPEC NO: REP-CB02

Style Number/Color	728S c. 8503
Product Type	Carpet Cove Base (4"H Main) (12"H Treads)
Construction	CPG - Cut Pile Graphics
Fiber	100% C.F. Lextron Enviro-Green Nylon
Dye Method	Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Action Bac


Specifications

Gauge	1/10
Stitches per Inch	9
Tufted Weight	26 oz per sq/yd
Total Weight Finished	64 oz
Pile Thickness	.250 in. Approx.
Width	12 ft
Suggested Install	Adhesive per Manufacturer's Recommendation

Performance

Traffic Class	Recommended for Cove Base only
Radiant Panel	Class I
Smoke Density	ASTM E 662 Less than 450
Pattern Repeat	.25 in. W x .25 in. L

Warranty	10 Year Wear Guarantee
-----------------	-------------------------------

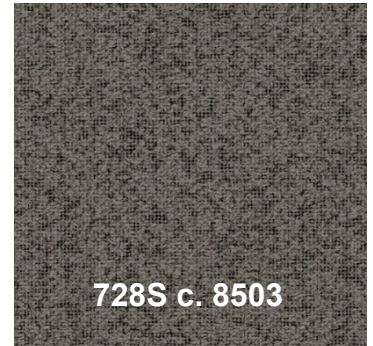

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Product Notes

1. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
Colors may vary slightly from dye lot to dye lot.
2. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
3. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.



IHG SPEC NO: REP-CP01
Tarkett Style: LPX32

HARTEX® 32 SPECIFICATIONS

SPECIFICATION DATA

Product Name	Hartex® 32
Material Weight	32 oz./sq. yd.
Density	8.0 lbs./cu. ft.
Thickness	0.335"
Product Dimensions	6' x 60' (40 SY)
Color	Gray
Tensile Strength	161.4 lbs
Traffic Class	Heavy
FHA Class	2
Material Content	100% Pre-Consumer Synthetic Fiber – Needle-punched and Thermal Bonded
Indoor Air Quality	CRI Green Label Plus-certified



Pad to be used with REP-CPT05

FLAME CERTIFICATION

Pill Test	Pass	DOC-FF 1-70
Radiant Panel	Class I	ASTM E648
Smoke Test	<450	ASTM E662

THERMAL INSULATION

R-Value	2.12
---------	------

PRODUCT OVERVIEW

Hartex 32 is made from 100% pre-consumer synthetic fiber and will not support the growth of mold or mildew, and offers a quick and easy installation process. Hartex 32 has excellent thermal insulation and acoustical properties. Hartex 32 provides comfort underfoot and is less fatiguing than direct-glue-down installations. Contributes to LEED® credits. LEED points must be considered along with other building components and must be determined by the specifier/architect or LEED accredited representative.

Hartex 32 is designed for use in commercial and hospitality applications, including, but not limited to: guest rooms, meeting rooms, offices, dorm rooms, and retail space. Hartex 32 should be installed using conventional stretch-in installation only.



Leggett & Platt
INCORPORATED

P.O. Box 727 | 34 Industrial Court E | Villa Rica, GA 30180 | 800.241.1148 | P 770.459.3653 | F 770.459.3655 | LPHospitality.com

Accore™

Product Specification

1. PROPRIETARY PRODUCT/MANUFACTURER

- 1.1. **Proprietary Product:** Accore Luxury Vinyl flooring is a rigid core construction engineered from the inside, out—and designed to outperform the extreme demands of today's hospitality environments. Suitable for light commercial hospitality environments such as guest rooms.
- 1.2. **Manufacturer:**
Tarkett Hospitality
285 Kraft Dr..
Dalton, GA 30721
Web: www.tarketthospitality.com
Phone: (800)-871-3211
- 1.3. **Proprietary Product Description:**
- 1.3.1. **Construction:** Tarkett Accore is an Ortho-Phthalate-Free, 100% virgin material Rigid Core luxury vinyl constructed with a plastic core and an IXPE acoustical backing.
- 1.3.2. **Characteristics:**
 - **Edge treatment:** Micro-Bevel
 - **Overall thickness:** 0.197" (5 mm)
 - **Wearlayer Thickness:** .020" (0.51 mm)
 - **Core Thickness:** 0.157" (4 mm)
 - **Accoustical Backing:** 0.039" (1 mm) IXPE
 - **Installation System:** Click-Drop-Lock (I4F)
- 1.3.3. **Tile/Plank size and Packaging:**
7" x 60" (17.78 cm x 152.4 cm)
8 tile per box, 23.62 ft² (2.19 m²), 38 lbs. (17.24kg),
55 boxes per pallet

2. PRODUCT PERFORMANCE AND TECHNICAL DATA

- 2.1. **Rigid Core Polymeric Floor Tile** (ASTM F3261): Class I, Type A or B, Grade 1, Backing Class B
- 2.2. **Dimensional Stability** (ASTM F2199): Passes
- 2.3. **Indentation Recovery** (ASTM F1914): Passes
- 2.4. **Heat Stability** (ASTM F1514): $\Delta E \leq 8$
- 2.5. **Light Stability** (ASTM F1515): $\Delta E \leq 8$
- 2.6. **Impact Sound Reduction** (ASTM E2179): $\Delta IIC \geq 20dB$
- 2.7. **IIC Impact Sound Reduction Rating** (ASTM E492): 68 (tested with 6" concrete slab with drop ceiling)
- 2.8. **Chemical Resistance** (ASTM F925): Passes
- 2.9. **VOC Requirements** (ASTM D5116): $< 0.1 \text{ mg/m}^3$

3. INSTALLATION

See Accore installation instructions for complete details.

Floating installations do not require any adhesives.

For Glue Down installations, see below:

3.1. Adhesives:

- **Tarkett C-GU High Moisture Adhesive**
Porous & Non-Porous Substrates: 125-150 sq. ft. per gallon

4. AVAILABILITY AND COST

Available direct through Tarkett retailers nationwide.

5. MAINTENANCE

72 hours after installation is completed, initial maintenance procedures must be implemented in accordance with manufacturer's requirements. Refer to Even Plane Maintenance Instructions for complete maintenance details.

6. TECHNICAL SERVICES

Visit us on the web at www.tarketthospitality.com

Contact Technical support at (800) -871-3211

7. WARRANTY

Limited 15-year Light Commercial warranty. For complete details, contact Tarkett or an authorized Tarkett retailer.



avid Hotels: Public Areas Carpet Broadloom Carpet @ Corridor

Product Information - IHG SPEC NO: REP-CPT01

Style Number/Color	B0614 c. 172
Product Type	Intrepid Broadloom
Construction	Multi-Level Pattern Cut/Loop
Fiber	CF Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	LX24 Cushion

Specifications

Size	12 ft. Width
Gauge	1/10
Stitches per Inch	10
Tufted Weight	30 oz per sq/yd
Total Weight Finished	106 oz
Pile Thickness	.250 in.
Total Thickness	.375 in.
Pattern Repeat	Approx. 72 in x 121 in.

Performance

Traffic Class (TARR)	Moderate
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP2380


Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.
Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

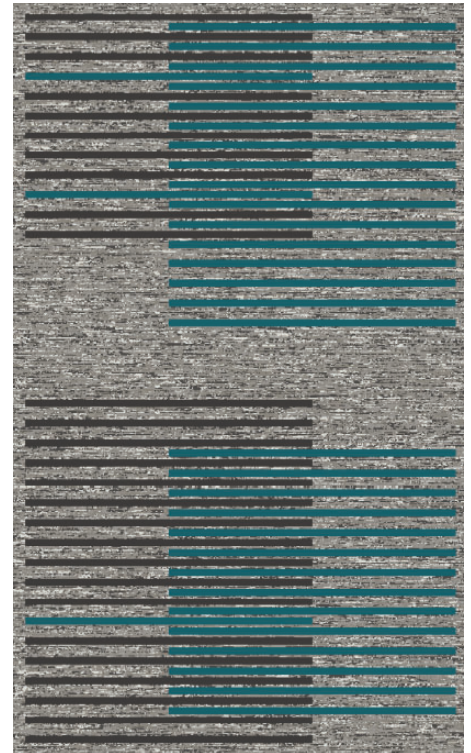

avid Hotels: Public Areas Carpet

Broadloom Carpet @ Corridor Door Drops & Transitions

Product Information - IHG SPEC NO: REP-CPT02

Style Number/Color	B0620 c. 172
Product Type	Intrepid Broadloom
Construction	Multi-Level Pattern Cut/Loop
Fiber	CF Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	LX24 Cushion

Specifications

Size	12 ft. Width
Gauge	1/10
Stitches per Inch	10
Tufted Weight	30 oz per sq/yd
Total Weight Finished	106 oz
Pile Thickness	.250 in.
Total Thickness	.375 in.
Pattern Repeat	Approx. 36 in. W x 63 in. L

Performance

Traffic Class (TARR)	Moderate
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP2380

Warranty

10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.
Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.



avid Hotels: Public Areas Carpet Broadloom Carpet @ Elevator Lobby

Product Information - IHG SPEC NO: REP-CPT03

Style Number/Color	B0612 c. 172
Product Type	Intrepid Broadloom
Construction	Multi-Level Pattern Cut/Loop
Fiber	CF Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	LX24 Cushion

Specifications

Size	12 ft. Width
Gauge	1/10
Stitches per Inch	10
Tufted Weight	30 oz per sq/yd
Total Weight Finished	106 oz
Pile Thickness	.250 in.
Total Thickness	.375 in.
Pattern Repeat	Approx. 144 in. W x 312 in. L

Performance

Traffic Class (TARR)	Moderate
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP2380


Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.
Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

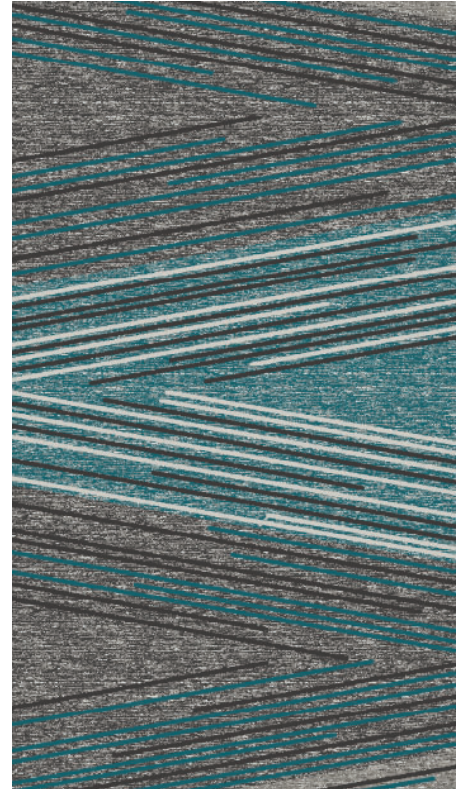


avid Hotels: Public Areas Carpet Broadloom Carpet @Stairwells

Product Information - IHG SPEC NO: REP-CPT04

Style Number/Color	B0616 c. 120
Product Type	Dynamics Broadloom
Construction	Multi-Level Pattern Cut/Loop
Fiber	CF Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Actionbac

Specifications

Size	12 ft. Width
Gauge	1/10
Stitches per Inch	10
Tufted Weight	32 oz per sq/yd
Total Weight Finished	68 oz
Pile Thickness	.250 in.
Pattern Repeat	Approx. 72 in. W x 131 in. L

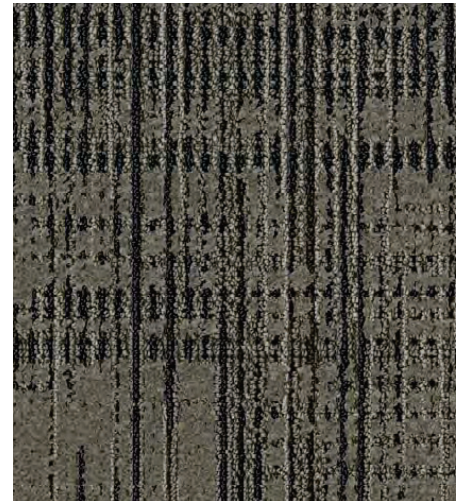

Performance

Traffic Class (TARR)	Moderate
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP2380

Warranty

10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.
Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.


avid Hotels: Public Areas Carpet Broadloom Carpet @BOH

Product Information - IHG SPEC NO: REP-CPT04

Style Number/Color	B0618 c. 120
Product Type	Dynamics Broadloom
Construction	Multi-Level Pattern Cut/Loop
Fiber	CF Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Actionbac

Specifications

Size	12 ft. Width
Gauge	1/10
Stitches per Inch	10
Tufted Weight	32 oz per sq/yd
Total Weight Finished	68 oz
Pile Thickness	.250 in.
Pattern Repeat	Approx. 72 in. W x 131 in. L

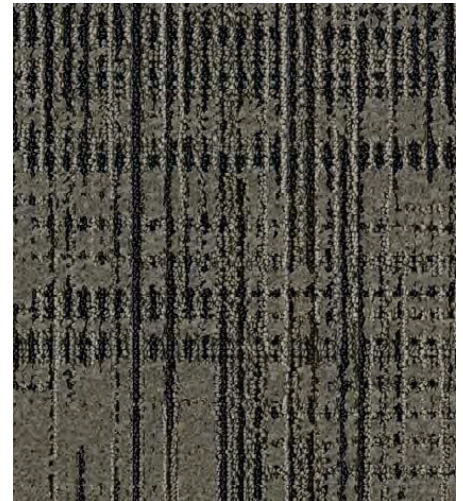

Performance

Traffic Class (TARR)	Moderate
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP2380

Warranty

10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.
Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**avid Hotels: Public Areas Carpet
Area Rug @ Lobby Lounge**

Product Information - IHG SPEC NO: REP-RG01

Style Number/Color	B0628 c. 321
Product Type	Intrepid Broadloom
Construction	Multi-Level Pattern Cut/Loop
Fiber	CF Lextron Enviro-Green Nylon
Dye Method	100% Solution Dyed
Primary Backing	Woven Polypropylene
Backing	Actionbac


Specifications

Size	12ft. Width/Rug Size 11'10" x 11'10"
Gauge	1/10
Stitches per Inch	8
Tufted Weight	30 oz per sq/yd
Total Weight Finished	106oz
Pile Thickness	.250 in.
Total Thickness	.375 in.
Pattern Repeat	Approx. 72 in. W x 131 in. L
Backing	Actionbac

Performance

Traffic Class (TARR)	Moderate
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP2380

Warranty	10 Year Limited Warranty
-----------------	--------------------------

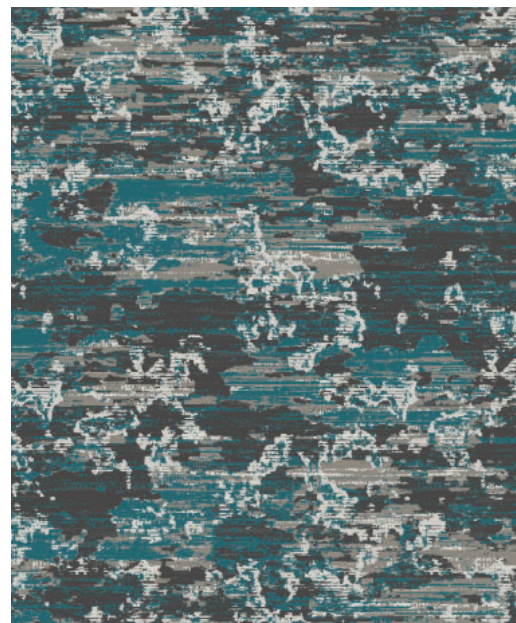

Binding color: 627

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104 CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Product Notes:

1. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
Colors may vary slightly from dye lot to dye lot.
2. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
3. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.

avid Hotels: Public Areas Carpet
Area Rug @ Lobby

Product Information - IHG SPEC NO: REP-RG02

Style Number/Color	B0626 c. 321
Product Type	Intrepid Broadloom
Construction	Multi-Level Pattern Cut/Loop
Fiber	CF Lextron Enviro-Green Nylon
Dye Method	100% Solution Dyed
Primary Backing	Woven Polypropylene
Backing	Actionbac


Specifications

Size	12ft. Width/Rug Size 5' x 13'
Gauge	10
Stitches per Inch	1/10
Tufted Weight	30 oz per sq/yd
Total Weight Finished	106 oz
Pile Thickness	.250 in.
Total Thickness	.375 in.
Pattern Repeat	Approx. 72 in. W x 131 in. L
Backing	Actionbac

Performance

Traffic Class (TARR)	Moderate
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP2380

Warranty	10 Year Limited Warranty
-----------------	--------------------------

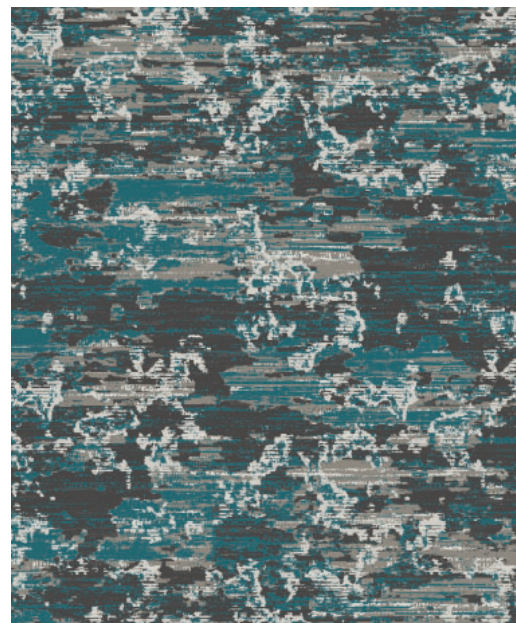

Binding color: 627

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104 CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Product Notes:

1. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
Colors may vary slightly from dye lot to dye lot.
2. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
3. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.

avid Hotels: Resilient Wall Base
Guestroom & Public Space Areas

Resilient Wall Base


IHG SPEC NO: REG-RB01 - Guest Room Area

Style Number **MW-32-H**
Color 32 Pebble
Product Type Millwork Resilient Wall Base
Size 4.5" H x 3/8" Thick x 8' L
Carton Size 40 LF per Carton




IHG SPEC NO: REP-RB01 - Lobby

Style Number **MW-29-H**
Color 29 Moon Rock
Product Type Millwork Resilient Wall Base
Size 4.5" H x 3/8" Thick x 8' L
Carton Size 40 LF per Carton



IHG SPEC NO: REP-RB04 - Heart of House: Employee Breakroom, Employee Restroom, Housekeeping Laundry, Maintenance / Engineering, Mechanical Room, Storage

Style Number **CB-29**
Color 29 Moon Rock
Product Type Millwork Resilient Wall Base
Size 4" H x 1/8" Thick x 120' L
Carton Size 120' Coil



IHG SPEC NO: REP-RB05 - Fitness Center

Style Number **MW-40-H**
Color 40 Black
Product Type Millwork Resilient Wall Base
Size 4.5" H x 3/8" Thick x 8' L
Carton Size 40 LF per Carton




avid Hotels: Resilient Products
Public Space Areas

Resilient Stair Nosings

IHG SPEC NO: REP-RB02 - Stairwells

Style Number	VCD-63
Color	63 Burnt Umber (Use on Main Stair)
Product Type	Vinyl Stair Nose
Size	12' L
Carton Size	10 pieces per Carton


Style Number	VCD-VL2
Color	VL2 Whispering Mist (Use on Top/Bottom Stair)
Product Type	Vinyl Stair Nose
Size	12' L
Carton Size	10 pieces per Carton

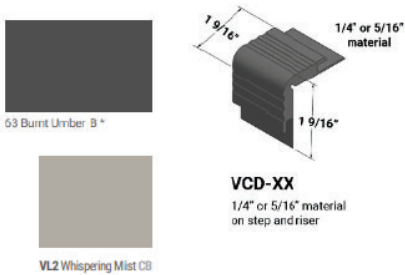

Rubber Sports Flooring

IHG SPEC NO: REP-RF01- Fitness Center

Style Number	COMR-RA2
Color	RA2 Infared
Product Type	Recycled Composite Rubber
Size	48" W x 50'L Roll
Roll Size	200 sf per Roll

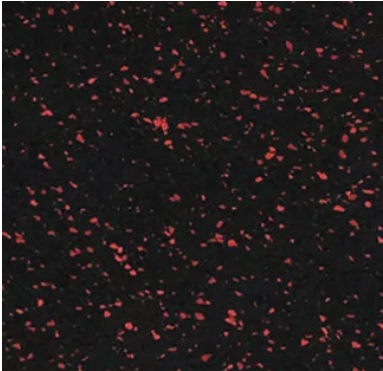



Tarkett Hospitality
285 Kraft Drive
Dalton, GA 30721

800.871.3211
tarketthospitality.com