











RG9 Crystallized W TB3 Dover CG \*



RH1 Marbra CG 23 Vapor Grey CG \*



TA5 Colonial Grey CG \*



20 Charcoal WG \*



RH8 Quantum CB 24 Grey Haze WG \*



RH9 Cedarstone WG 32 Pebble WG \*




**RH4** Dolomite WG 460 Cotton W \*




RH5 Calcite WG 27 Mist WG \*



31 Zephyr CB \*

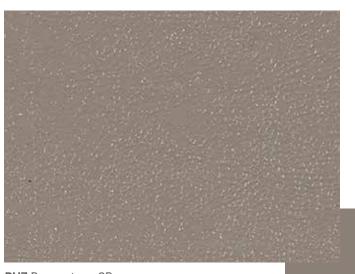

**RH7** Brownstone CB TA8 Welsh Castle CB \*

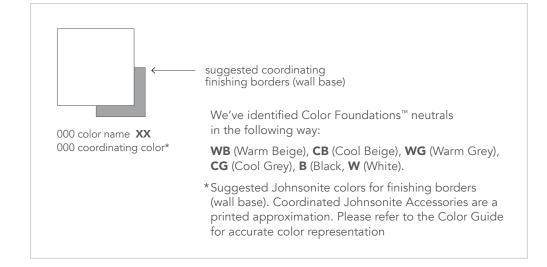



No one covers you better.



At Tarkett, we believe in placing people in the center of every space. So we've developed a portfolio of products designed to work together both functionally and aesthetically, helping you create more productive workspaces that maximize return on investment.

The Tarkett Solution SPECtrum helps you expertly recommend a flooring platform for the specific needs of every space and every budget. And our full palette of colors, patterns, and textures is coordinated to work together visually across platforms. So the endless balance of function, safety, and longevity is always done on budget, in style, sustainably. Without compromise.



#### PRODUCTS SHOWN

- 1.TANDUS CENTIVA WOVEN: GRAMA STRIAE II (SUGAR CANE)
- 2. JOHNSONITE RUBBER TILE: METALLURGY™ (COCOA CABANA)
- 3. TANDUS CENTIVA MODULAR: LINU STRATA II (MINERAL BATH)
- 4. JOHNSONITE RUBBER TILE: PENTAGONAL SHAPES (DIAMOND) ORGANICS (BROWNSTONE)
- 5. JOHNSONITE RUBBER TILE: ORGANICS (DOLOMITE)
- 6. JOHNSONITE LINOLEUM: LENZA HARMONIUM XF<sup>2</sup> (THICKET)
- 7. JOHNSONITE RUBBER TILE: ORGANICS (CEDARSTONE)
- 8. JOHNSONITE MILLWORK: INFLECTION (PEARL)
- 9. JOHNSONITE RUBBER TILE: SOLID HAMMERED (FAWN)
- 10. JOHNSONITE ACCESSORIES: SLIM LINE TRANSITION (GREY HAZE)
- 11. JOHNSONITE HOMOGENEOUS SHEET: IQ OPTIMA (RAW IVORY)

Color may vary from actual swatch. To order a sample, please visit tarkettna.com.

Organics rubber flooring is designed to provide a balanced solution for the competing demands of every project—with special focus on Comfort, Durability and Ease of Maintenance.







Comfort

Durability

Maintenance

## Doing Good— Together.

At Tarkett North America, we believe that together, we can make a positive impact on people and the planet. That's why we're Doing Good-Together, connecting our sustainability efforts with what our customers value and our world needs. It's an active, living commitment to create a future where people and the planet prosper in balance. Where sustainable flooring solutions don't just perform, they inspire.

With incredible strength and durability, Tarkett's rubber flooring balances the needs of every project with comfort and style. Its composition of natural and recycled material is virtually maintenance-free, with no wax needed for the life of the floor. Non-PVC rubber is naturally slip resistant, absorbs shock and sound, and is manufactured in a facility that operates on 97% recycled water and 100% renewable electricity.

- Floor Score<sup>™</sup> certified and meets CA 01350
- Cradle to Cradle Bronze certified
- Phthalate-free, except for recycled materials
- Non-PVC
- Part of the ReStart® take-back program
- Made in the U.S.A. in an ISO 9001 and ISO 14001 certified plant





#### DESIGNING FOR LIFE

Developing products based on Cradle to Cradle® principles that contribute to people friendly spaces AND respect the planet's natural capital.



### CLOSING THE LOOP

Building a circular economy inclusive of programs and business models that encourage take back, reuse, recycling and elimination of waste.



# DRIVING COLLABORATION

Inviting others to join us in Doing Good through education, collaboration, transparency and communication.

ORGANICS		
TECHNICAL DATA	STANDARDS	ORGANICS
Type of Floor Covering	ASTM F1344	Rubber Floor Tile
Classification	ASTM F1344	Class 1-A and 1-B
Total Thickness	ASTM F386	1/8" (3.175 mm) Standard
Static Load Limit	ASTM F970	Passes
Radiant Heating	ASTM F710	≤ 85°F
Electrostatic Propensity	AATCC134	< 2 kV
Impact Sound Transmission	ISO 140-8/ 717-2	35 IIC
Heat Stability by Color Change	ASTM F1514	E ≤ 8.0
Hardness	ASTM D2240	Min 85 Shore A
Dimensional Stability	ASTM F2199	≤ 0.15%
Abrasion Resistance	ASTM D3389	< 1g loss after 1,000 cycles
Slip Resistance	ASTM D2047	SCOF ≥ 0.8
Flame Resistance	ASTM E648	Class 1
Smoke Density	ASTM E662	< 450
Chemical Resistance	ASTM F925	Good
Tile and Plank Size	Width x Length	Tile: 12" x 24" (305 mm x 610 mm)
		Plank: 6" x 48" (152 mm x 1.22 m)
Quantity (per carton)		Tile: 16 Tiles @ 32 sq. ft (3.0 m²) per carton
		Plank: 16 Planks @ 32 sq. ft (3.0 m²) per carton
Weight (per carton)		32 lbs (14.5 kg)
Colors		10
Surface Textures	Leather - LRGC-XX	Standard

Please visit tarkettna.com for the most updated specifications, and installation, cleaning and maintenance instructions.

How to Order: Surface Code - Color Number - Color Name - Size - Thickness (example: LRGC- RG9 Crystallized - 1/8" thickness)









On the Cover: RH4 Dolomite WG RH9 Cedarstone WG





TARKETTNA.COM 800.899.8916



**Tarkett North America** 

30000 Aurora Rd Solon, OH 44139 800.899.8916 **tarkettna.com** 

42399400050